

Home Energy Grants: Technical Bulletin

Heating Controls Installation Guidance

Series 2024-09-001 HCU



Installation guidance for heating controls upgrade

This technical bulletin outlines common technical and administrative non-compliance issues noted by SEAI for heating controls upgrade (HCU) works. The information below is intended as guidance. All measures must be installed as per the <u>Domestic Technical Standards and Specification (DTSS)</u> and in accordance with the <u>Contractors Code of Practice</u>. Please see the Contractors Support page for further information: https://www.seai.ie/grants/supports-for-contractors/.

The <u>Quality Assurance and Disciplinary Procedures (QADP)</u> document contains a full list of checks, used by SEAI inspectors. This list should be used to check your work, prior to completing and signing the Declaration of Works (DOW) form. Nominated Personnel must not sign the DOW stating that the works have been completed to standard if non-compliances are outstanding.

Remember: you must confirm the eligibility of the home for a heating controls upgrade *prior* to works commencing, noting that homes are only eligible where they previously had no, or very basic, heating controls.

1. Common reworks

Take care to avoid these common errors noted by SEAI inspectors:

TRV installed in room with room stat

Thermostatic Radiator Valves (TRVs) must not be fitted in rooms with a room thermostat as this causes inaccuracies in the thermostatic control.

TRVs must be installed in accordance with the manufacturer's guidelines and DTSS Section 6.7.3.



Immersion heater timer not fitted but required

Where required, electric immersion heaters must be fitted with a timer.

Timer and temperature control equipment must conform to Section 6.7.4 of the DTSS.



Incorrect fusing



Many spur switches will come with a 13-amp fuse as standard. However, depending on which type of boiler is present in the home, you will need to replace this for the correct fuse type:

Gas Boilers = 3 Amp Fuse

Oil Boilers = 5 Amp Fuse

Cross bonding not complete

Earthing/cross bonding <u>MUST</u> be completed on all exposed metallic pipework under the terms of SEAI grant programmes. Please ensure correct bonding has been installed at the boiler, hot press and gas supply to ensure compliance with ETCI rules.





No auto bypass installed where required

In fully pumped systems, an automatic bypass circuit must be installed in homes where there are 3 or more TRVs in place, or where the boiler manufacturer requires one. Please see the *DTSS Section 6.7.3* for exact specifications.

2. Combi boilers

For heating controls installation in homes with a combi boiler, contractors <u>MUST</u> install an additional space heating zone as part of the grant works.

As such, the following items are *not applicable* and **must be ticked as N/A** on the DOW:

- 1) Separated pipework for Space Heating and Domestic Hot Water (N/A for combi Boilers)
- 2) Time clock for immersion heater (N/A for combi Boilers)
- 3) Cylinder thermostat and wiring (N/A for combi Boilers)

The remaining six (6) of the nine (9) contributing items **must be** *newly* **installed**, as demonstrated in *Figure 1* below.

Please see DTSS Section 6.7 for further information and QADP Appendix 2, Section 2.5 for a full list of heating controls checks.

		Item	Pre- existing	Installed as part of grant works	N/A			
	1	Separated pipework for Space Heating and Domestic Hot Water* (N/A for combi Boilers)			Q			
	2	Boiler interlock arrangement*		lacktriangledown				
These 6 items must be newly installed where a combi boiler is present	3	Thermostat controlling 1 Space Heating zone and wiring*						
	4	24hr/7day programmer with minimum 2 channels*		A				
	5	Time clock for immersion heater* (N/A for combi Boilers)			<u> </u>			
	6	Cylinder thermostat and wiring* (N/A for combi Boilers)			Ā			
		Additional space heating zone(s):						
	7	Separated pipework for two Space Heating zones (e.g., downstairs/upstairs) *						
	8	Thermostat controlling an additional space heating zone and wiring*		$ \swarrow $				
	9	Thermostatic Radiator Valves (TRVs) *		lacksquare				
		The items listed below do not contribute to the requirement to have 6 newly installed items.						
		The following items must be in place with heating controls where applicable. Pleasi indicate if they are pre-existing or newly installed as part of heating controls grant works.	Pre- existing	Installed as part of grant works	N/A			
	10	Hot water cylinder insulation (factory applied if new cylinder)			Q			
	11	Auto by-pass						
	12	Compliant earthing and equipotential Bonding		M				

Figure 1. Example of compliant DOW for homes with a combi boiler

3. Declaration of works (DOW)

Incorrect completion of DOW forms is a common source of error which can result in payment delays, grant declines and reworks. We would like to draw your attention to the following important points regarding completion of the DOW:

Minimum number of newly installed items

It is vital that at least 6 out of 9 prescribed items on the DOW are newly installed as part of the grant works.

			ltem	Pre- existing	Installed as part of grant works	N/A		
At least 6 of these items must be newly installed as part of the grant works	1 /	1	Separated pipework for Space Heating and Domestic Hot Water* (N/A for combi- Boilers)					
		2	Boiler interlock arrangement*					
	1	3	Thermostat controlling 1 Space Heating zone and wiring*					
		4	24hr/7day programmer with minimum 2 channels*					
		5	Time clock for immersion heater* (N/A for combi Boilers)					
These 3 items do		6	Cylinder thermostat and wiring* (N/A for combi Boilers)					
not contribute			Additional space heating zone(s):					
towards the minimum requirement for newly installed items but must be present for safe and optimum operation of the heating system		7	Separated pipework for two Space Heating zones (e.g., downstairs/upstairs) *					
		8	Thermostat controlling an additional space heating zone and wiring*					
	`	9	Thermostatic Radiator Valves (TRVs) *					
			The items listed below do not contribute to the requirement to have 6 newly installed items.					
		1	The following items must be in place with heating controls where applicable. Please indicate if they are pre-existing or newly installed as part of heating controls grant works.	Pre- existing	Installed as part of grant works	N/A		
		10	Hot water cylinder insulation (factory applied if new cylinder)					
		11	Auto by-pass					
		12	Compliant earthing and equipotential Bonding					

Figure 2. Extract from Heating Controls Upgrade DOW

Important Reminder:

Items 7 and 8 (Separated Pipework for Two Space Heating Zones and Thermostat Controlling an Additional Space Heating Zone & Wiring) are interdependent. Where one has been installed as part of the grant works, the other must also be present (but can be pre-existing).

Failure to comply with the above requirements will mean that the works will be considered seriously non-compliant and may result in de-registration from the Better Energy Homes programme, in line with our Quality Assurance and Disciplinary Procedures (QADP).

Replacement of existing equipment

Replacement of existing heating control equipment *does not* constitute new installation, even where the existing equipment is old and/or no longer functioning.

Signing off on works

Please note that if Section 2 (c) of the DOW is not completed accurately, the documents will be returned to the homeowner and grant payment will be delayed until such time as a correctly completed DOW has been received.

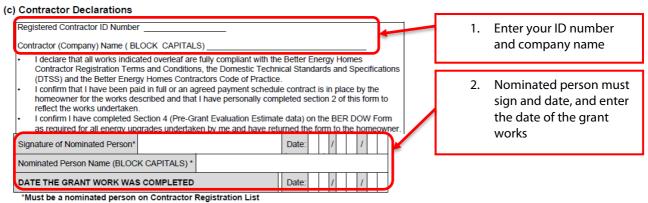


Figure 3. Extract from Heating Controls Upgrade DOW, Section 2 (c)

Total cost

Please note that if you are carrying out other works such as replacement or repair of a boiler in tandem with the heating controls upgrade, the total cost declared on the DOW must only include the cost of installing heating controls. Boiler costs are not relevant as they are not grant funded.

If you have any technical queries in relation to the completion of the DOW, please contact our technical helpdesk at: 01-2776977.

w: www.seai.ie e: info@seai.ie **t:** 01 8082100









